


RUGGED PROCESS WATER IMMERSION HEATER WITH 2½ NPT FITTING

MTS-3 Series
Starts at
\$725




MTS-330E2/480V/3P, \$975, shown smaller than actual size.

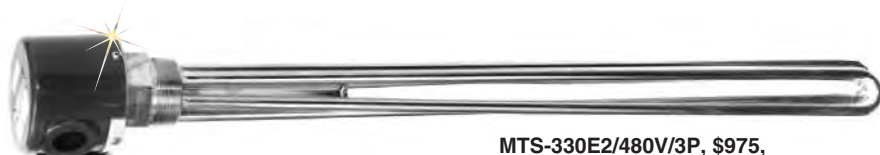


MTS-360A/480V/3P, \$875, shown smaller than actual size.

- ✓ Stainless Steel Wetted Construction
- ✓ 120, 208, 240, 480V; 1 and 3-Phase Power
- ✓ Reliable Heater Design
- ✓ General Purpose Enclosure, NEMA 1 (IP00) Rated and UL Listed

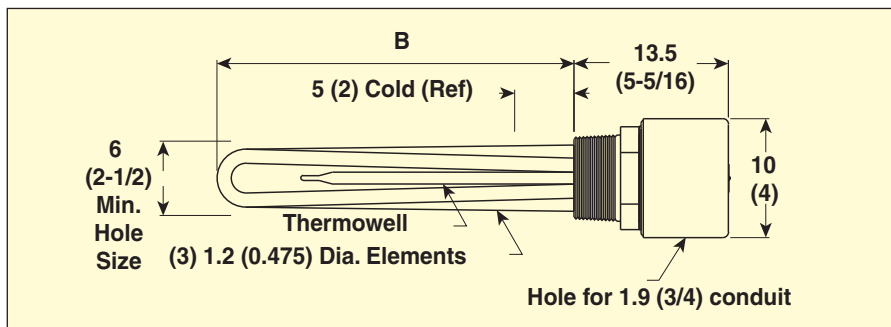

Dimensions: cm (in)

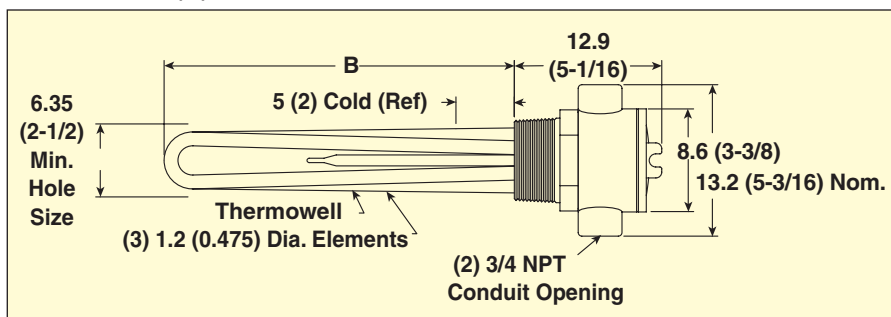

Please Note: This immersion heater should be used with an approved temperature control device to ensure safe operation. See Section P for our selection of process controllers.

CAUTION AND WARNING!
Fire and electrical shock may result if products are used improperly or installed or used by non-qualified personnel.

 MOST POPULAR MODELS HIGHLIGHTED!

To Order (Specify Model Number)				E1 Gen. Purpose Enclosure ¹			E2 Moist-/Explos-Res. Enc. ²		
kW	W/in ²	No. Htg. Elem.	Dim. B cm (in)	Model No.	Price	Wt. kg (lb)	Model No.	Price	Wt. lb (kg)
3	51	3	17 (6 ⁷ / ₈)	MTS-330A/**/***	\$725	2 (5)	MTS-330E2/**/***	\$975	4 (8)
4.5	48	3	28 (10 ⁷ / ₈)	MTS-345A/**/***	800	3 (6)	MTS-345E2/**/***	1050	4 (9)
6	48	3	43 (16 ⁷ / ₈)	MTS-360A/**/***	875	3 (6)	MTS-360E2/**/***	1100	4 (9)
7.5	53	3	49 (18 ¹ / ₁₆)	MTS-375A/**/***	925	3 (6)	MTS-375E2/**/***	1159	4 (9)
9	47	3	61 (24)	MTS-390A/208V/**/***	1010	3 (7)	MTS-390E2/**/***	1250	5 (10)
12	46	3	81 (31 ⁷ / ₈)	†MTS-3120A/208V/**/***	1150	4 (9)	†MTS-3120E2/**/***	1400	5 (12)
15	46	3	101 (39 ³ / ₈)	†MTS-3150A/208V/**/***	1300	5 (10)	†MTS-3150E2/**/***	1550	6 (13)
18	51	3	118 (46 ⁷ / ₈)	†MTS-3180A/208V/**/***	1400	5 (12)	†MTS-3180E2/**/***	1650	7 (15)

¹ Designate voltage: insert "120" for 120 Vac, "208" for 208 Vac, "240" for 240 Vac or "480" for 480 Vac.

² Designate voltage: insert "208" for 208 Vac, "240" for 240 Vac or "480" for 480 Vac.

³ Add suffix "3P" to the model number for 3-phase power, no extra charge (not available for 120 V models).

⁴ Heaters with general purpose enclosures are UL listed and CSA certified except models with † (exceed 48 amps).

⁵ Heaters with moisture-resistant/explosion-resistant enclosures are CSA NRTL/C certified and are not intended for use in hazardous areas, except models with † (exceed 48 amps).

Ordering Example: MTS-330A/480V, 3 kW heater powered by 1-phase 480 Vac, \$725.